

Дисплеи 3202, 3225

Технические характеристики

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +375-257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: pcn@nt-rt.ru || сайт: <https://prelectronics.nt-rt.ru/>



Pulse isolator / switch amplifier

3202

- Input: NAMUR, NPN open collector, contact
- Output: 2 x relay or NPN transistor output
- 2.5 kVAC 4-port galvanic isolation
- Line Fault Detection (LFD) / cable break detection
- Power supply 16.8 VDC...31.2 VDC



Functional highlights

- Interfaces a NAMUR sensor to typical control system input cards.
- High 4-port isolation provides surge suppression that protects the control system from transients and noise and eliminates ground loops.
- Provides simple splitter function: 1 in – 2 out.
- Monitor signal source for cable short-circuit or cable break with alarm function on secondary output, power rail and LED status.
- The device can be mounted in Safe area or in Zone 2 / Division 2 areas.
- All terminals are over-voltage protected, polarity protected and short-circuit protected.

Technical highlights

- Output options: NPN transistor or mechanical relay.
- Response time: Relay < 20 ms / NPN < 0.1 ms.
- Collective DIN-rail alarm.
- Line Fault Detection (LFD) / cable break detection.
- Wide ambient temperature range -25...70°C.
- NAMUR NE21, NE44.
- Conforms to IEC 60947 standard - switch amplifiers for NAMUR sensors.



Programming

- Easy configuration via DIP-switches.

Mounting

- Units can be mounted side by side, horizontally and vertically, without air gap on a standard DIN rail, even at 70°C ambient temperature.
- Units can be supplied separately or installed on PR 9400 power rail.
- The narrow 6.1 mm housing allows up to 163 units per meter.

Applications

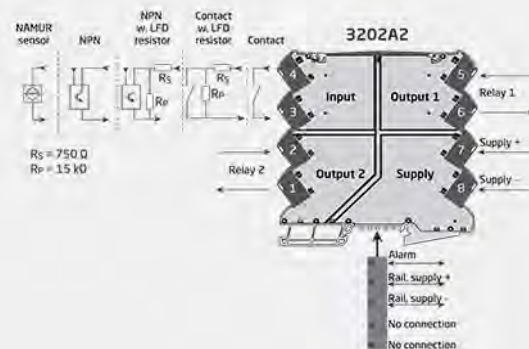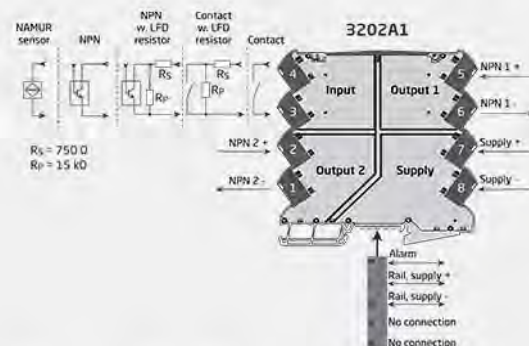

Order

Type	Version		
3202	Pulse isolator / switch amplifier, NPN output	: A1	With power rail connector / terminals : -
	Pulse isolator / switch amplifier, relay output	: A2	Supplied via terminals : -N

Example: 3202A1-N (Pulse isolator / switch amplifier, NPN output, supplied via terminals)

Environmental Conditions

Operating temperature.....	-25°C to +70°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & meas. / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	113 x 6.1 x 115 mm
Weight approx.....	70 g (3202A1) / 80 g (3202A2)
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.5 mm ² / AWG 26...12 stranded wire
Screw terminal torque.....	0.5 Nm

Common specifications

Supply	
Supply voltage.....	16.8...31.2 VDC
Max. power dissipation.....	0.65 W (3202A1) / 0.95 W (3202A2)
Max. required power.....	≤ 1.2 W

Isolation voltage

Isolation voltage, test / working.....	2.5 kVAC / 300 VAC (reinforced)
--	---------------------------------

Auxiliary supplies

Sensor supply limitation.....	8.2 VDC, max. 8.2 mA @ 0 VDC
-------------------------------	------------------------------

Input specifications

NAMUR input

NAMUR according to.....	EN 60947-5-6
Trig level LOW.....	< 1.2 mA
Trig level HIGH.....	> 2.1 mA
Sensor supply.....	8.2 VDC

NPN and mechanical switch

Max. input frequency.....	5 kHz
Trig level LOW.....	< 1.2 mA
Trig level HIGH.....	> 2.1 mA
Max. input voltage.....	24 VDC

Output specifications

Relay output

Max. voltage.....	250 VAC / 200 VDC
Max. current.....	2 AAC
Max. AC power.....	100 VA
Max. DC current, resistive load ≤ 30 VDC.....	2 ADC
Max. DC current, resistive load > 30 VDC.....	See manual for details
Max. switching frequency.....	20 Hz
Response time.....	< 20 ms

NPN output

Max. voltage.....	30 VDC
Max. switching frequency.....	5 kHz
Min. pulse length.....	> 0.1 ms
Max. voltage drop at 80 mA.....	2.5 VDC
Response time.....	< 0.1 ms

Observed authority requirements

EMC.....	2014/30/EU & UK SI 2016/1091
LVD.....	2014/35/EU & UK SI 2016/1101
ATEX.....	2014/34/EU & UK SI 2016/1107
RoHS.....	2011/65/EU & UK SI 2012/3032

Approvals

ATEX.....	KEMA 10ATEX0147 X
IECEX.....	KEM 10.0068X
UKEX.....	DEKRA 21UKEX0055X
c FM us.....	FM17US0004X / FM17CA0003X
c UL us, UL 61010-1.....	E314307
CCC.....	2020322310003554



Universal frequency converter

3225

- Input: NAMUR, NPN, PNP, Tacho, TTL, S0 & switches
- Output: Universal mA / V or relay
- 2.5 KVAC isolation
- DIP-switch or display programmable
- Power supply 16.8 VDC...31.2 VDC



Functional highlights

- Measures frequencies up to 100 kHz.
- Active current output.
- Buffered voltage output 10 VDC.
- 2-point process calibration.
- User-programmable trigger levels -0.05...6.5 V and sensor supply 5...17 V.
- NAMUR sensor error detection.
- Output relay with windows, setpoint and latch functionality.
- Simulation of process value during commissioning / maintenance.
- Fast response time, with simultaneous sensor error detection (PATENTED).
- All terminals are over-voltage protected, polarity protected and short-circuit protected.

Technical highlights

- Accuracy < 0.06% / span.
- Response time < 30 ms.
- 2.5 kVAC, 3-port galvanic isolation.
- Wide ambient temperature range -25...70°C.
- NAMUR NE21, NE43.


Programming

- Easy configuration via DIP-switches.
- Factory calibrated in all selectable measurement ranges.
- Configuration, monitoring, and diagnostics using PR 4500 detachable communication interfaces via the PR 4590 ConfigMate.
- All programming can be password protected.
- Scrolling help text in 7 languages.

Mounting

- Units can be mounted side by side, horizontally and vertically, without air gap on a standard DIN rail, even at 70°C ambient temperature.
- Units can be supplied separately or installed on PR 9400 power rail.
- The narrow 6.1 mm housing allows up to 163 units per meter.

Applications

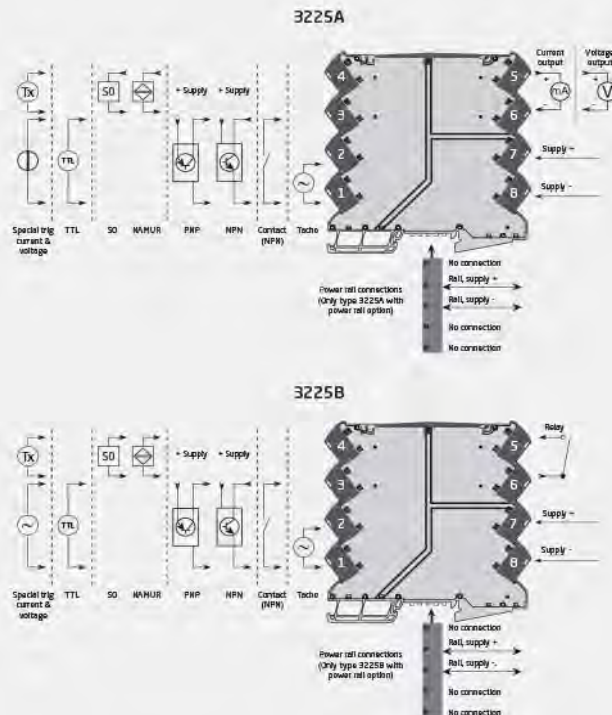

Order

Type	Version		
3225	Universal frequency converter, analog output	: A	With power rail connector / terminals : -
	Universal frequency converter, alarm relay output	: B	Supplied via terminals : -N

Example: 3225B-N (Universal frequency converter, alarm relay output, supplied via terminals)

Environmental Conditions

Operating temperature.....	-25°C to +70°C
Storage temperature.....	-40°C to +85°C
Calibration temperature.....	20...28°C
Relative humidity.....	< 95% RH (non-cond.)
Protection degree.....	IP20
Installation in.....	Pollution degree 2 & meas. / overvoltage cat. II

Mechanical specifications

Dimensions (HxWxD).....	113 x 6.1 x 115 mm
Weight approx.....	70 g
DIN rail type.....	DIN EN 60715/35 mm
Wire size.....	0.13...2.5 mm ² / AWG 26...12 stranded wire
Screw terminal torque.....	0.5 Nm

Common specifications

Supply

Supply voltage.....	16.8...31.2 VDC
Fuse.....	400 mA SB / 250 VAC
Max. required power.....	≤ 1.2 W
Max. power dissipation.....	0.65 W

Isolation voltage

Isolation voltage, test / working.....	2.5 kVAC / 300 VAC (reinforced)
--	---------------------------------

Response time

Response time (0...90%, 100...10%).....	≤ 30 ms
---	---------

Auxiliary supplies

Sensor supply limitation.....	23 mA, 5...17 V
Signal dynamics, output.....	18 bit
Long term stability, current, 1yr / 5yr @ 25°C.....	≤ 0.058% / ≤ 0.101%
Long term stability, voltage, 1yr / 5yr @ 25°C.....	≤ 0.032% / ≤ 0.058%
Accuracy.....	See manual for details
EMC immunity influence.....	< ±0.5% of span
Extended EMC immunity: NAMUR NE21, A criterion, burst.....	< ±1% of span

Input specifications

Frequency input

Frequency range.....	0.001 Hz to 100 kHz
Time range, time function.....	10 μs to 999.9 s
Max. frequency / min. pulse width, with input filter ON.....	75 Hz / 8 ms

Sensor specifications

Tacho, trig-level LOW / HIGH.....	≤ -50 mV / ≥ +50 mV
NPN / PNP, trig-level LOW / HIGH.....	≤ 4.0 V / ≥ 7.0 V
TTL, trig-level LOW / HIGH.....	≤ 0.8 V / ≥ 2.0 V
S0, trig-level LOW / HIGH.....	≤ 2.2 mA / ≥ 9.0 mA
NAMUR, trig-level LOW / HIGH.....	≤ 1.2 / ≥ 2.1 mA

Special voltage / current input

User-programmable trig-levels.....	-0.05...6.50 V
User-programmable trig-levels.....	0.0...10.0 mA

Output specifications

Current output

Signal range, active.....	0...23 mA
Programmable signal ranges.....	0 / 4...20 mA
Load (@ current output).....	≤ 600 Ω
Load stability.....	≤ 0.001% of span / 100 Ω
Response time, programmable.....	0.0...60.0 s
Sensor error indication.....	0 / 3.5 / 23 mA / none
Current limit.....	≤ 28 mA

Voltage output

Signal range.....	≤ 11.5 VDC
Programmable signal ranges.....	0...1; 0...5; 0...10; 0.2...1; 2...10 VDC
Load (@ voltage output).....	≥ 10 kΩ
Response time, programmable.....	0.0...60.0 s

Relay output

Relay functions.....	Setpoint, Window and Latch
Hysteresis.....	0...100%
ON and OFF delay.....	0...3600 s
Power On delay.....	0...9999 s
Sensor error reaction.....	Break / Make / Hold
Max. voltage.....	250 VAC / 200 VDC
Max. current.....	2 A
Max. AC power.....	100 VA
Max. DC current, resistive load ≤ 30 VDC.....	2 ADC
Max. DC current, resistive load > 30 VDC.....	See manual for details

Observed authority requirements

EMC.....	2014/30/EU & UK SI 2016/1091
LVD.....	2014/35/EU & UK SI 2016/1101
RoHS.....	2011/65/EU & UK SI 2012/3032
ATEX.....	2014/34/EU & UK SI 2016/1107

Approvals

ATEX.....	KEMA 10ATEX0147 X
IECEX.....	KEM 10.0068X
UKEX.....	DEKRA 21UKEX0055X
c UL us, UL 61010-1.....	E314307
CCC.....	2020322310003554

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +375-257-127-884

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

эл.почта: pcn@nt-rt.ru || сайт: <https://prelectronics.nt-rt.ru/>