




8501 Многоцелевой защитный корпус для цифровых дисплеев

Технические характеристики

Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астана (7172)727-132	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Астрахань (8512)99-46-04	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Барнаул (3852)73-04-60	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Белгород (4722)40-23-64	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Брянск (4832)59-03-52	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Владивосток (423)249-28-31	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Волгоград (844)278-03-48	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Вологда (8172)26-41-59	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Воронеж (473)204-51-73	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Екатеринбург (343)384-55-89	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Иваново (4932)77-34-06	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Ижевск (3412)26-03-58	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54	

FIELD ENCLOSURE FOR LCD / LED INSTRUMENTS

- **Cut-out dimensions fit PR displays**
- **IP65 tightness**
- **4 M16 threaded holes in the bottom**
- **Easy mounting on wall or panel**
- **Strong powder coating on outer surfaces**

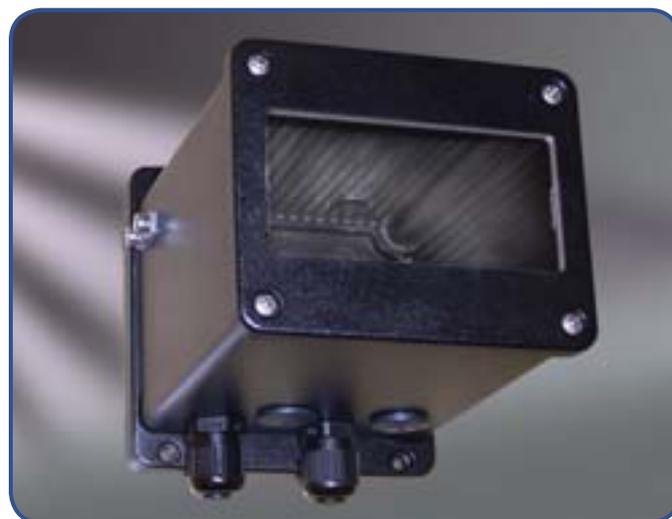

Application:

- Multi-purpose enclosure with cut-out hole for mounting of PR electronics' LCD / LED instruments type 5511, 5514, 5515, 5531A and 5714.
- 8501 is suitable for protection of PR LCD / LED instruments to be mounted in harsh process environments.
- The type 8501 enclosure complies with industrial standards for efficient protection of process equipment in wet areas up to IP65.

Technical characteristics:

- The enclosure is made of corrosion resistant aluminium.
- All surfaces are protected with a salt-water proof powder coating.
- Fixing screws for front and backplate are made of stainless, acid proof steel.
- Can be delivered with up to 4 M16 cable glands. Safety plugs are fitted in unused cable gland entries.

Mounting / installation:

- To be mounted on wall by way of 4 mounting screws (not included).

Technical specifications:

Ambient temperature.....	-20...+60°C
Material.....	Al Mg Si 0.5, DIN 1725
Dimensions, backplate.....	112 x 112 mm
Dimensions, enclosure (HxWxD).....	92 x 112 x 143 mm
Cut-out dimensions.....	44.5 x 91.5 mm
Mounting dimensions.....	100 x 85 mm
Tightness.....	IP65, EN 60529
Surface treatment, powder coated ..	Polyester
Colour.....	RAL 9005 matt
Screws and ground terminal.....	Stainless, acid proof steel
Cable glands.....	M16 x 1.5
Material.....	Polyamide
Tightness.....	IP68
Colour.....	RAL 9005
Cable diameter.....	Ø 4,5...10 mm
Safety plugs.....	M16 x 1.5
Material.....	Polyamide
Tightness.....	IP68
Colour.....	RAL 9005
Weight.....	750 g

Order: 8501

Type	Cable glands
8501	1 cable gland : A
	2 cable glands : B
	3 cable glands : C
	4 cable glands : D

По вопросам продажи и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89
Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48

Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81
Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижегород (831)429-08-12
Новокузнецк (3843)20-46-81

Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54

Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес для всех регионов: pcn@nt-rt.ru || www.prelectronics.nt-rt.ru

